



**MOD. IMRE  
IMRF**

液位传感器/液位计 4-20 mA  
Analogic 4-20 mA level sensor

IMRE



IMRF

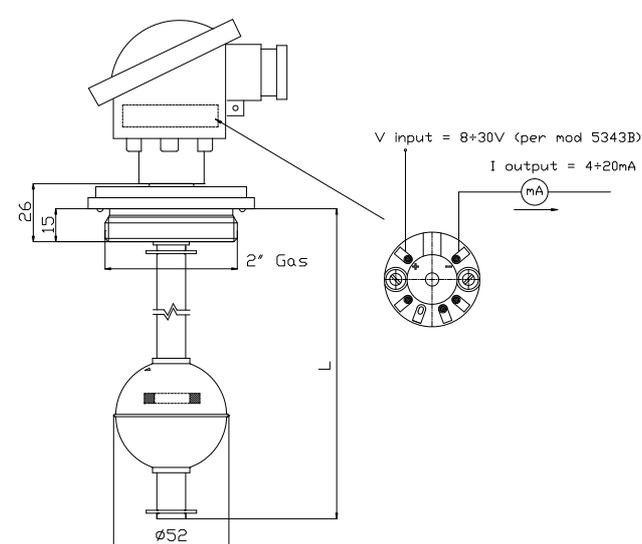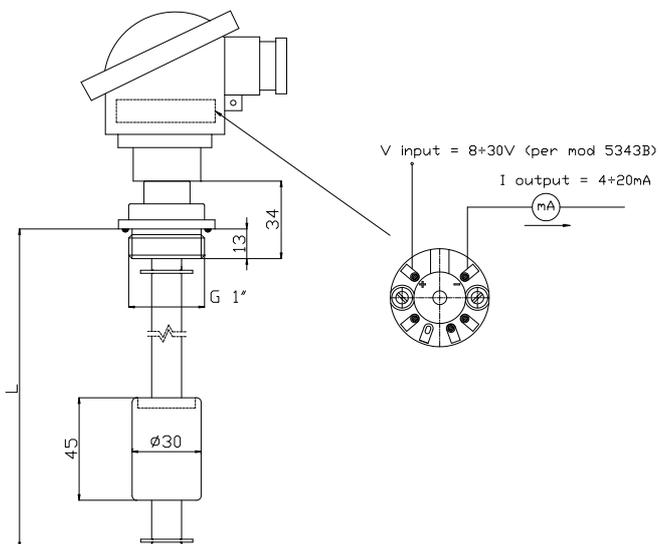

使用介质	水-矿物油-柴油-汽油
安装	IMRE A/ 1G (不锈钢304)
	IMRF 2 G 304 不锈钢
管	铜
浮球	IMRE NBR 16
	IMRF 316不锈钢
Seeger	鳞状青铜/316不锈钢
电气连接	DIN B 铝接线盒
防护等级	IP65
动作方式	1B
环境污染	正常
流体比重	>0.6
工作温度	-15°C/+80°C
距离	10/20mm
工作规则	见附页
输出信号	4-20mA 信号

• Use	Water - Mineral oils-Diesel fuel-Petrol
• Fixing	IMRE A/ 1" gas (AISI 304 on request)
	IMRF Inox AISI 304 2" gas
• Stem	Brass / steel
• Float	IMRE NBR
	IMRF Inox AISI 316
• Seeger	Phosphorous bronze / AISI 316
• Electrical connection	Terminal blocks Aluminum DIN B
• Protection degree	IP65
• Action type	1B
• Pollution situation	normal
• Fluid specific weight	> 0,6
• Working temperature	-10°C / +80°C
• Pitch (Resolution)	10/20 mm
• Working principle	see page 18
• Output signal	Analogic 4-20 mA

客户定制请注明(长度, 安装类型等), 请联系我们的客户服务。  
For customized version (length, type of fixing, etc.) please contact our customer service

正确选用请参照2008年出版样本的技术参数。  
For a correct use please refer to "General Notes" in the Euroswitch sensors catalogue, edition 10/2008.